



TECHNIWATCH

swiss precision tools

ANTI-SCRATCH BENT TWEEZERS

Hand fitting / Positioning flat

Ref.: B162000-C

ANTI-SCRATCH BENT TWEEZERS ARE USEFUL FOR FITTING HANDS WHERE THERE IS A FLANGE FITTED, BUT ALSO FOR COUNTERS.

The technical specifications of the polymer used to make its interchangeable tweezer tips were designed exclusively for the watchmaking and jewellery fields. This material does not scratch precious materials. It has a sufficiently hard surface not to be worn, and become charged with particles.

The bent shape of these tweezers makes them ideal for fitting watch hands. Thanks to their geometry, you can hold them parallel to the dial when fitting hands. This really optimises your stability and precision during the operations.

In case of wear or breakage, its tips can be replaced easily using a screwdriver.

We can also design other custom shapes.



Technical specifications:

- Anti-scratch polymer tips
- Interchangeable tips

Size:

128 x 15 x 9 mm

Weight:

17 grams

References:

B162000-C (full tweezers)

B162000-EBC (set of upp. + lwr. tips)

B162001-EBC-S (upp. tip)

B162002-EBC-I (lwr. tip)

Techniwatch SA

Route de la Jaluse 5b,
2400 Le Locle
Tel : 032 926 19 46
www.techniwatch.ch

Discover our presentation videos on our YouTube channel « Techniwatch SA »
Also accessible by scanning the following QR code





TECHNIWATCH

swiss precision tools

ANTI-SCRATCH BENT TWEEZERS

Product details




RECOMMENDATIONS:

These high-end tweezers must be used with care. The synthetic tips remain fragile and can break if dropped for example.

The alignment of the two points can be corrected at any time since the tips have an angular play. You need only unscrew the four slotted screws slightly, make the adjustment, and retighten the screws. Make sure not to apply an excessive torque.

The tips can be cleaned by quickly giving them a quick wipe with an alcohol-soaked cloth.

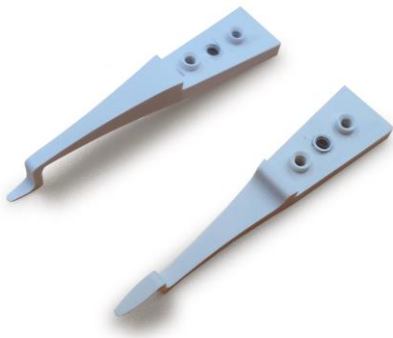

REPLACING THE TIPS

Use a watchmaker's screwdriver for the slotted screws, and a mechanic's screwdriver (type PB 5180/1-80 - Screwdriver Pozidriv PZ1/SL 80 mm) for the central Phillips head screw.

When refitting, start by screwing in the slotted screws, without over-tightening them.

Then proceed to the self-tapping central screw, which requires a higher torque and axial pressure during screwing.

Orient the points so that they are correctly aligned and tighten the slotted screws last.

Techniwatch SA

Route de la Jaluse 5b,
2400 Le Locle
Tel : 032 926 19 46
www.techniwatch.ch

Discover our presentation videos on our YouTube channel « Techniwatch SA »
Also accessible by scanning the following QR code








TECHNIWATCH

swiss precision tools

ANTI-SCRATCH BENT TWEEZERS

Accessories

	Products	References
	Pair of tips	B162000-EBC
	Upper tip	B162000-EBC-S
	Lower tip	B162000-EBC-I

Techniwatch SA

Route de la Jaluse 5b,
2400 Le Locle
Tel : 032 926 19 46
www.techniwatch.ch

Discover our presentation videos on our YouTube channel « Techniwatch SA »
Also accessible by scanning the following QR code

